

Falcon Xpress Ovens



Falcon Xpress MRX

High Speed Oven

Superior cooking results **FAST!**

- Enhanced cavity airflow for perfect browning & crisping
- 3000W impingement enhances browning. Easily adjustable 0-100% fan speed
- 95° - 270°C temperature range cooks a variety of items
- 1000 or 2000W top antenna feed microwave system heats quickly, reduces cooking time.

Minimised footprint, maximised chamber design

- Compact footprint fits on 700mm deep counter
- Flexibility to install with or without 10cm leg kit
- Easily accommodates a 12" pizza

Multi-language universal operation, with programming flexibility:

- Touchscreen and programming software supports 25 languages
- Image-based menu selection eliminates language and literacy barriers
- Connectivity Standard: WiFi, Ethernet, and Smart USB standard

Appropriate for front-of-house display

- Sleek, contemporary styling
- True-Touch™ HD Touchscreen. Fully customisable 7" smartphone-like display
- Catalytic converter built-in for ventless operation
- Quiet operation: fan speeds auto-adjust based on operation mode

Safe operation and simple cleaning

- Inner door drops down below cooking surface for safe removal of food from cavity
- Smooth door surface allows for direct application of approved cleaners
- Non-stick oven liners available for easy cleaning
- Clean magnetic air filters in one-step
- Rapid cool down allows for expedited end-of-day cleaning

Included Accessories:

- Cook plate (CP10)
- Compact oven paddle (PA10R)
- Non-stick liners (TL10R)

Optional Accessories

- Panini Grill Plate (RGR10)
- Panini Press (PRS10R)
- Pizza Stone (ST10R)
- 10cm Leg kit (LG10)
- Oven Paddle (PA10)
- Non-stick Baskets (TB10S, SB10S, MB10S)
- Back Cover Panel (BC10R)
- Top Storage Shelf (TS10R)
- Stainless dual-oven stacking cart (SC10R)
- Stainless cart/equipment stands
- Oven Cleaner and Shield Protectant

Falcon Xpress MRX | Heavy Volume
This category of high speed oven is ideal for...

Applications

- Convenience Stores
- Satellite Locations
- Healthcare
- Hotel Room Service
- Snack Bars
- QSR
- Coffee Shops
- Bars/Pubs

Through put potential (per hour)

Food item	1000W	2000W
12" frozen pizza	18	21
6" toasted sandwiches	60	80
Grilled fresh Salmon	22	28
Toasted Bagel	120	120
Chicken wings	15	24
Quesadillas	65	70

Location of Oven(s):


- Kitchen countertop
- Front-of-house countertop
- Equipment stand
- Oven stacking cart (available accessory)

All Falcon Xpress products are supported by our culinary team. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times:

chef@falconfoodservice.com



Falcon Xpress MXP | High Speed Oven

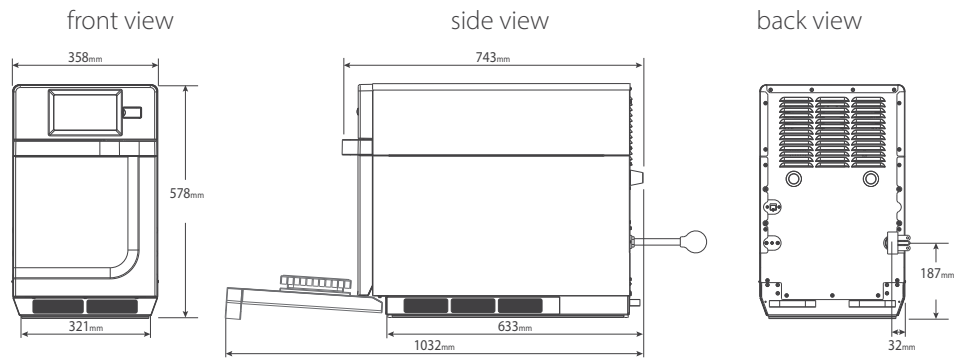

Dimensions			
Exterior	H 578	W 358	D† 743
Oven	H 178	W 312	D 312
Usable Oven Space	17.2 litres		
Door Depth	1032, drop down door		
Installation Clearances	Top: 51	Sides: 13	Back: None
Shipping Carton	H 677	W 584	D 883

Weight		
Model Type	Product Weight	Ship weight (approx.)
2× Magnetron	61 kg	69 kg
1× Magnetron	53 kg	61 kg

A type D circuit breaker should be installed for all high-speed oven installations.

Measurements are millimeters.




* IEC 60705 Tested

† Includes handle

‡ Catalytic convertor filters grease and odors from the air. This product conforms to the Ventless Operation Recommendations set forth by NFPA96 using EPA202 test method

Features	
Configuration	Countertop
Stackable	Yes, with kit
Display	7" Capacitive Touch, High resolution LCD display
USB Port	Yes
Connectivity	Wifi and Ethernet
Program Menu	Tab & Multi-level menu capability
Menu Capacity	1200+ items
Max. Cooking Time	99:99
Temperature Range	95° - 270°C
Microwave Distribution	Rotating antennas, top
Fan Speed	0-100%
Power Levels	11
Defrost	Yes, microwave only, power level 2
Time Entry Option	Yes
Stage Cooking	Yes, 4
Catalytic Converter	Yes‡
Air Filter	3 removable, with clean filter reminder
Rack	Removable cooking surface
Door Opening	Pull down, ergonomic handle
Exterior Finish	Stainless steel and Painted Steel
Interior Finish	Stainless steel

Electrical Configuration

Model Number / Product Code	Power Consumption	Power Output*		Power Source	Plug Configuration		Cord Length	Frequency	Magnetron
		Microwave	Impingement						
MRX52F 710635512	5950 W, 28.6 A	2000 W*	3000 W	230-240 V, 50 Hz, 32 A, single phase	IEC 309		1.5m	2450 MHz	2
MRX523F 710634612	5950 W, 16 A	2000 W*	3000 W	400V, 50 Hz, WYE, 16 A, 3 phase, 5 wire	IEC 309		2.4m	2450 MHz	2
MRX51UF 710634512	2450 W, 13 A	1000 W*	3000 W	230-240 V, 50Hz, 13 A, single phase	BS1363/A		1.5m	2450 MHz	1



Falcon Foodservice Equipment, Wallace View, Hillfoots Road, Stirling, FK9 5PY, Scotland, UK
 t: (0)1786 455200 info@falconfoodservice.com www.falconfoodservice.com